




ACTUATOR: M20 SUBSEA

SL150

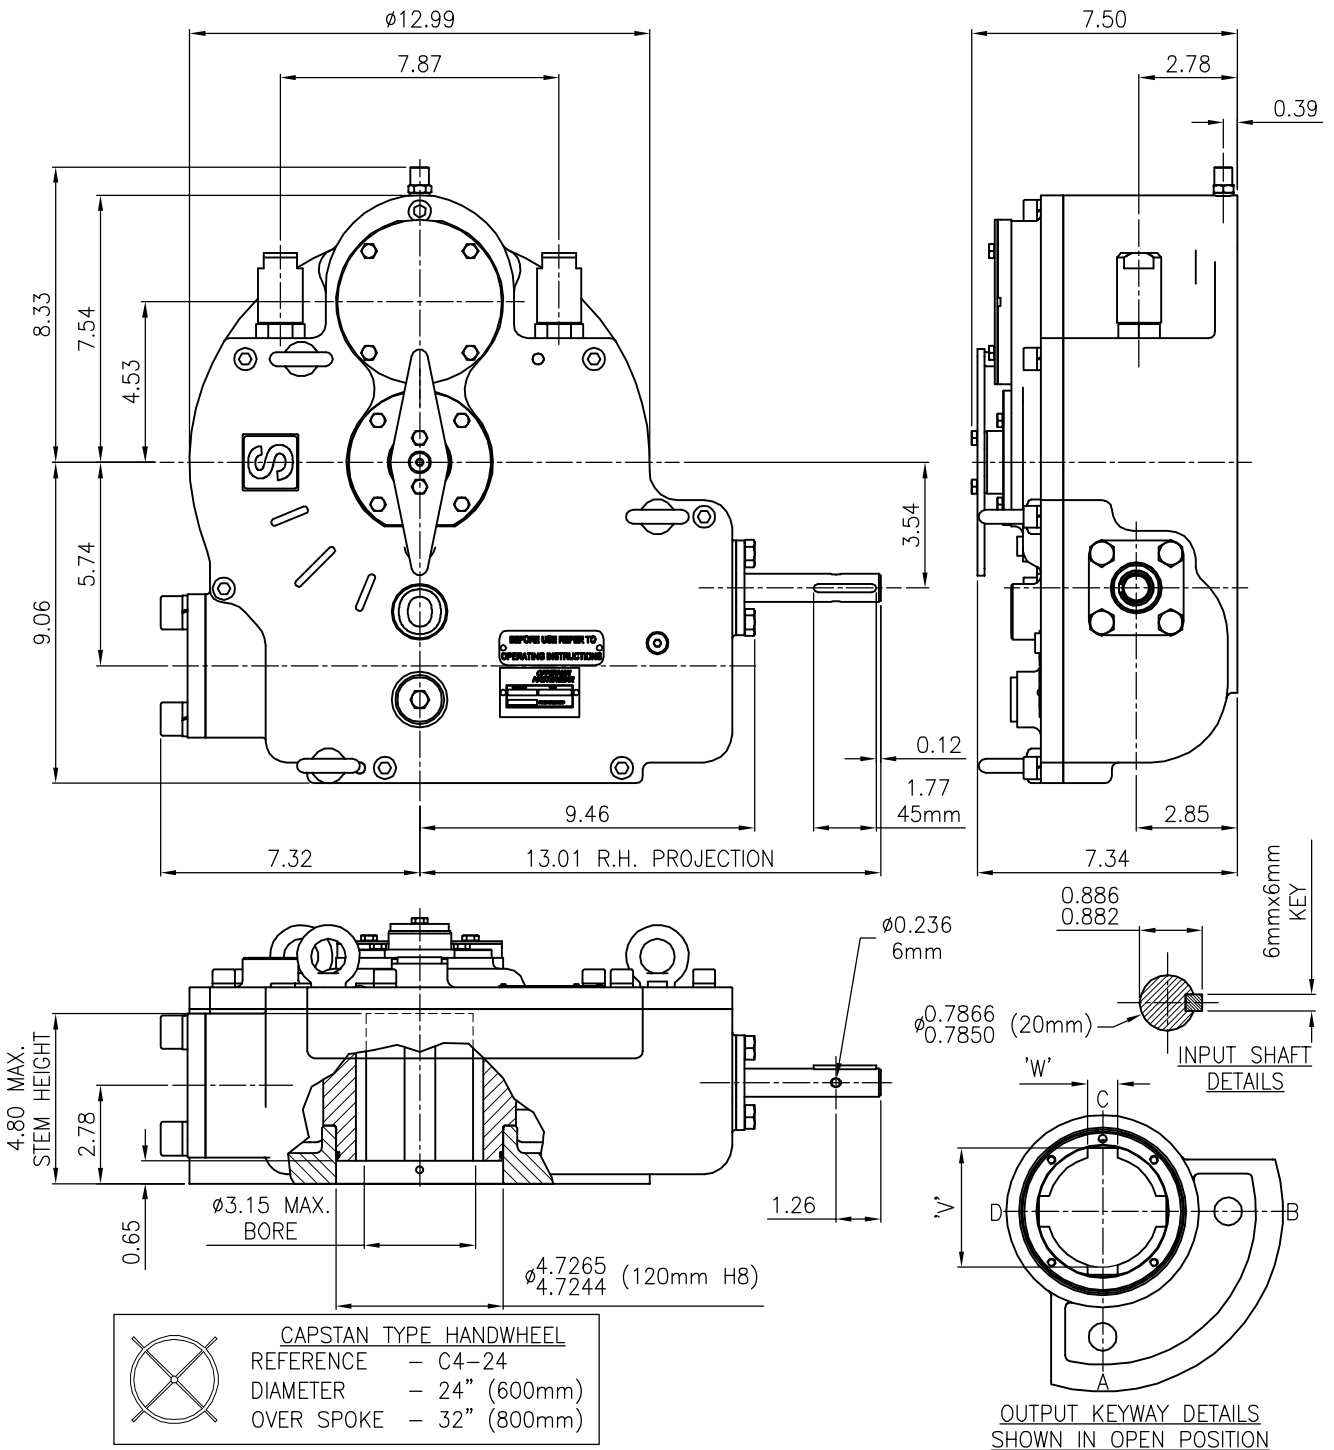

TRAVEL	90° ±5° AT BOTH ENDS	MECHANICAL ADVANTAGE	57.0 ± 10%
RATIO	183:1	MAXIMUM OUTPUT TORQUE(1000 Cycles).	70800 lb.ins.
TURNS TO CLOSE	45.75	MAXIMUM INPUT TORQUE	1240 lb.ins

MOUNTING HOLE DETAIL (ISO 5211)
 PREFERRED F25 (8 x M16 ON 10.00" PCD) APPROXIMATE WEIGHT 184 lb.
 MAXIMUM F30 (8 x M20 ON 11.73" PCD)
 MINIMUM F16 (4 x M20 ON 6.50" PCD)

 OPPERMAN MASTERGEAR Hambridge Lane, Newbury, Berkshire, RG14 5TS. ENGLAND Tel: 01635 811500 Fax: 01635 811501 E-Mail: sales@opperman-mastergear.co.uk	 To BS308	DIMENSIONS IN INCHES [mm]	DATE	19Aug08
			DRAWN	PAB
			CHECKED	
			SCALE	1:5
This drawing/design is the property of OPPERMAN MASTERGEAR Ltd. © and must not be used or copied without their specific written consent. Specifications may change without prior notification			DRG No. ME-16161-imp	REV. A