ACTUATOR: M40 SUBSEA (CLASS 1 & 2) SL150

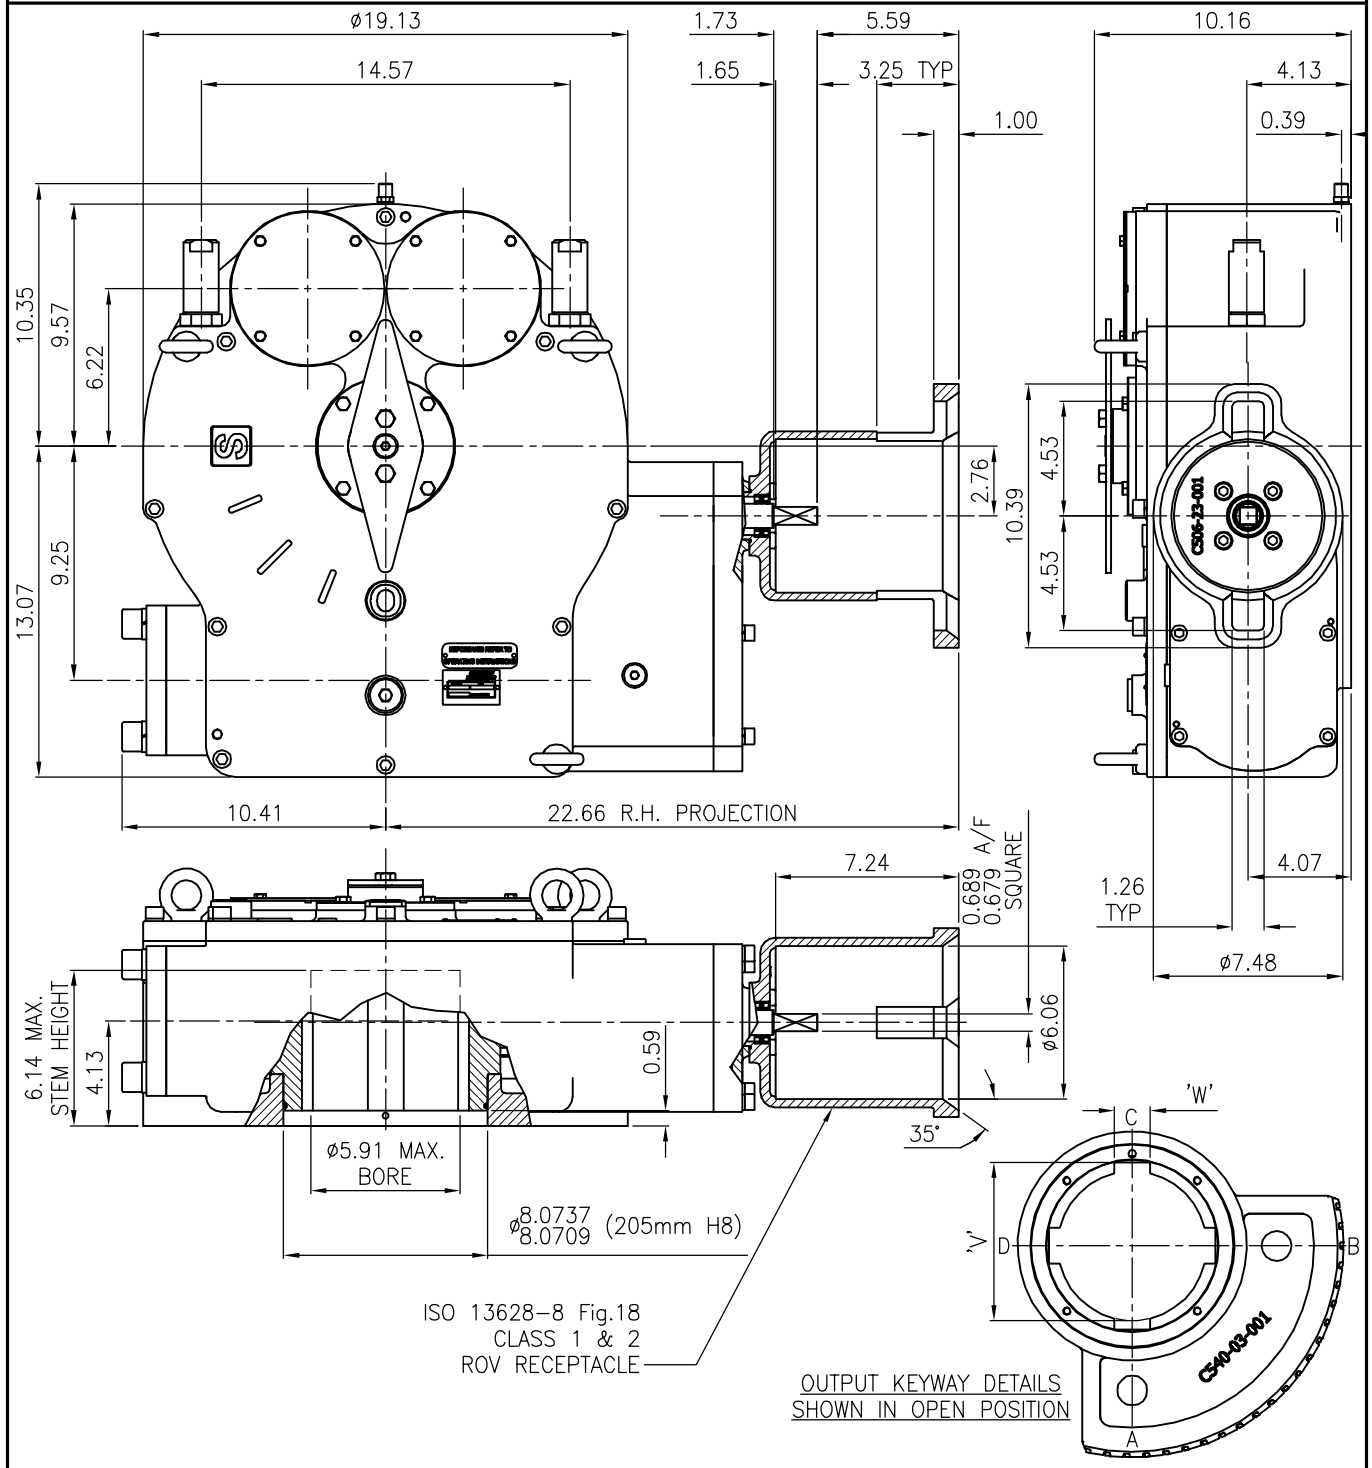

TRAVEL	90° ±5° AT BOTH ENDS	MECHANICAL ADVANTAGE	188.7± 10%
RATIO	615:1	MAXIMUM OUTPUT TORQUE(1000 Cycles)	212300 lb.ins.
TURNS TO CLOSE	153.75	MAXIMUM INPUT TORQUE	1125 lb.ins.

MOUNTING HOLE DETAIL (BSENISO 5211:2001)

PREFERRED ..... F40 (8 x M36 ON 15.98" PCD) APPROXIMATE WEIGHT ..... 578 lb.

MAXIMUM ..... F48 (8 x M36 ON 19.02" PCD)

MINIMUM ..... F25 (8 x M16 ON 10.00" PCD)

OPPERMAN MASTERGEAR

Hambridge Lane, Newbury, Berkshire, RG14 5TS. ENGLAND

Tel: 01635 811500 Fax: 01635 811501 E-Mail: sales@opperman-mastergear.co.uk

To BS308

DIMENSIONS IN MM [INCHES]

DATE	27Aug08
DRAWN	PAB
CHECKED	
SCALE	1:7

This drawing/design is the property of OPPERMAN MASTERGEAR Ltd. © and must not be used or copied without their specific written consent. Specifications may change without prior notification

DRG No. ME-16166-2-imp

REV. A