# ACTUATOR: M40 SUBSEA SL150

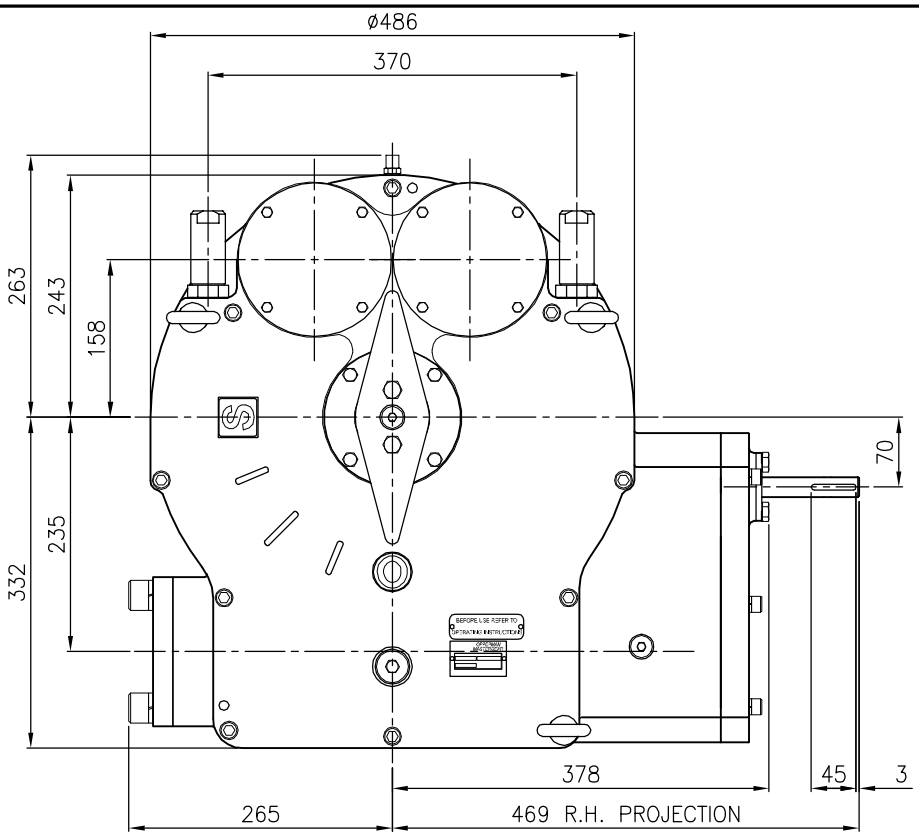


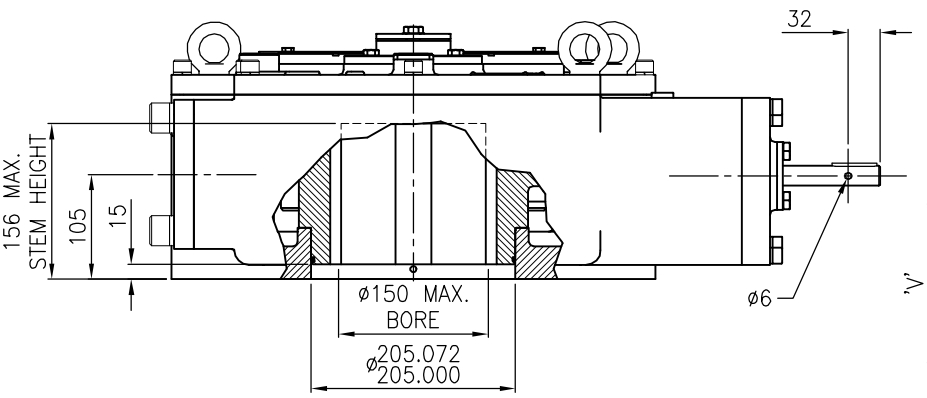





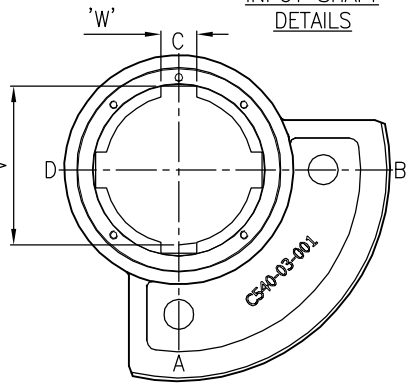


OUTPUT KEYWAY DETAILS
SHOWN IN OPEN POSITION



CAPSTAN TYPE HANDWHEEL
REFERENCE – C4–24
DIAMETER – 600mm [24"]
OVER SPOKE – 800mm [32"]

| | | | |
|---|---|---|---|
| TRAVEL | 90° ±5° AT BOTH ENDS | MECHANICAL ADVANTAGE | 188.7± 10% |
| RATIO | 615:1 | MAXIMUM OUTPUT TORQUE(1000 Cycles) | 24000 Nm |
| TURNS TO CLOSE | 153.75 | MAXIMUM INPUT TORQUE | 127 Nm |

MOUNTING HOLE DETAIL (BSENISO 5211:2001)

| | |
|---|---|
| PREFERRED | F40 ( 8 x M36 ON 406 PCD) |
| MAXIMUM | F48 ( 8 x M36 ON 483 PCD) |
| MINIMUM | F25 ( 8 x M16 ON 254 PCD) |

APPROXIMATE WEIGHT ..... 254 kg


OPPERMAN MASTERGEAR
Hambridge Lane, Newbury, Berkshire, RG14 5TS. ENGLAND
Tel: 01635 811500 Fax: 01635 811501 E-Mail: sales@opperman-mastergear.co.uk


To BS308

DIMENSIONS IN MM [INCHES]

| | |
|---|---|
| DATE | 07Aug08 |
| DRAWN | PAB |
| CHECKED | |
| SCALE | 1:7 |


This drawing/design is the property of OPPERMAN MASTERGEAR Ltd. © and must not be used or copied without their specific written consent. Specifications may change without prior notification


DRG No. ME–16165 REV. A