ACTUATOR TYPE-M15 PADLOCK FLANGE

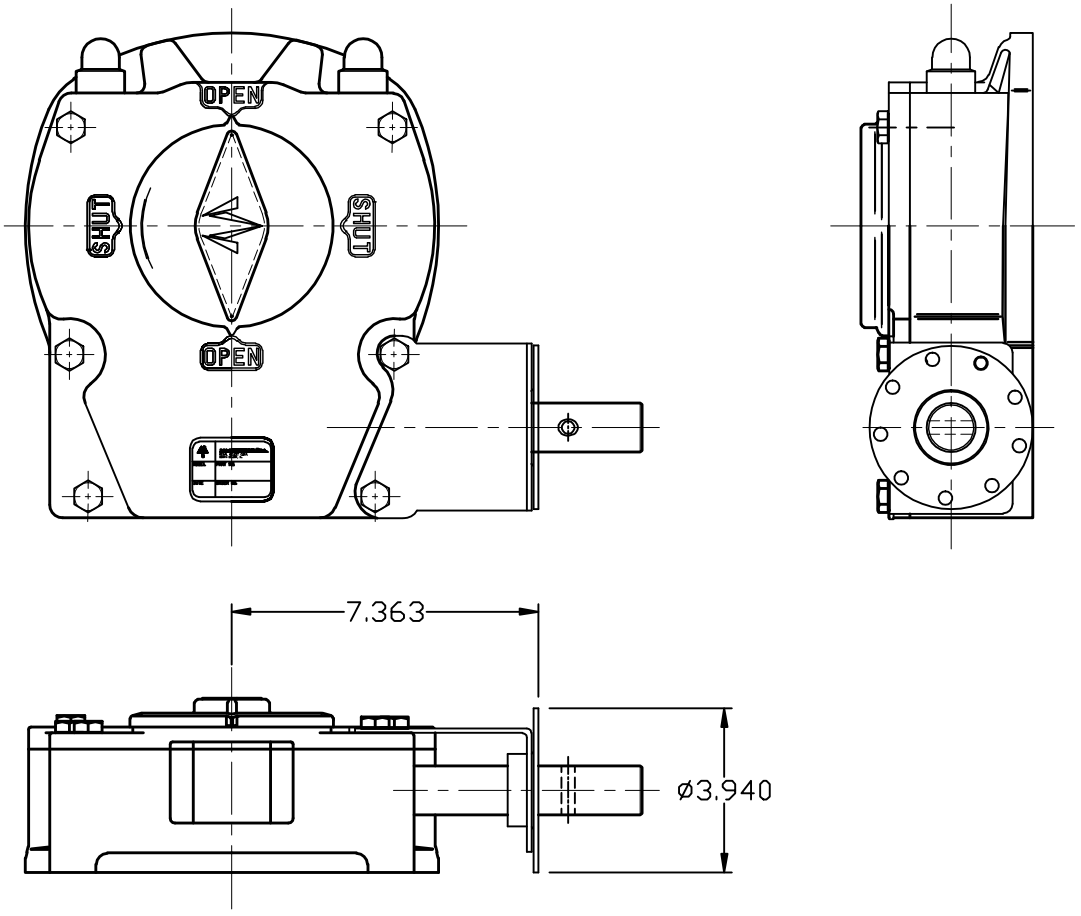

GENERAL INFORMATION

TRAVEL.....90° ±5° AT BOTH ENDS
RATIO.....68:1
TURNS TO CLOSE.....17
MECH. ADVANTAGE....20.5 ±10%

MAX. OUTPUT TORQUE (1000 CYCLES)..36080 IN-LBS
MAX. OUTPUT TORQUE (5000 CYCLES)..29920 IN-LBS
MAX. INPUT TORQUE (1000 CYCLES).....1760 IN-LBS
MAX. INPUT TORQUE (5000 CYCLES).....1461 IN-LBS

MOUNTING HOLE DETAIL: PREFERRED....FA16 (4 x 3/4-10 ON 6.50" BCD)
(MSS SP-101) MAXIMUM.....FA19 (8 x 5/8-11 ON 7.50" BCD)
MINIMUM.....FA14 (4 x 5/8-11 ON 5.50" BCD)

APPROXIMATE WEIGHT.....62.0 LBS (27.2 Kg) (excluding handwheel)

MASTERGEAR
A REGAL BELOIT COMPANY
5466 EAST ROCKTON RD. SOUTH BELOIT, IL 61080

DIMENSIONS IN INCHES	SCALE	DRAWING No.
	1:5	M15PL
	NJC	REV. B 10/10/06

THIS PRINT IS CONFIDENTIAL AND IS THE PROPERTY OF MASTERGEAR. THIS PRINT SHALL NOT BE USED, COPIED OR REPRODUCED I WHOLE OR IN PART NOR SHALL THE CONTENTS BE REVEALED IN ANY MANNER TO ANYONE UNLESS WRITTEN PERMISSION IS OBTAINED FROM MASTERGEAR. ©