ACTUATOR TYPE - MAWD44/TF14TP

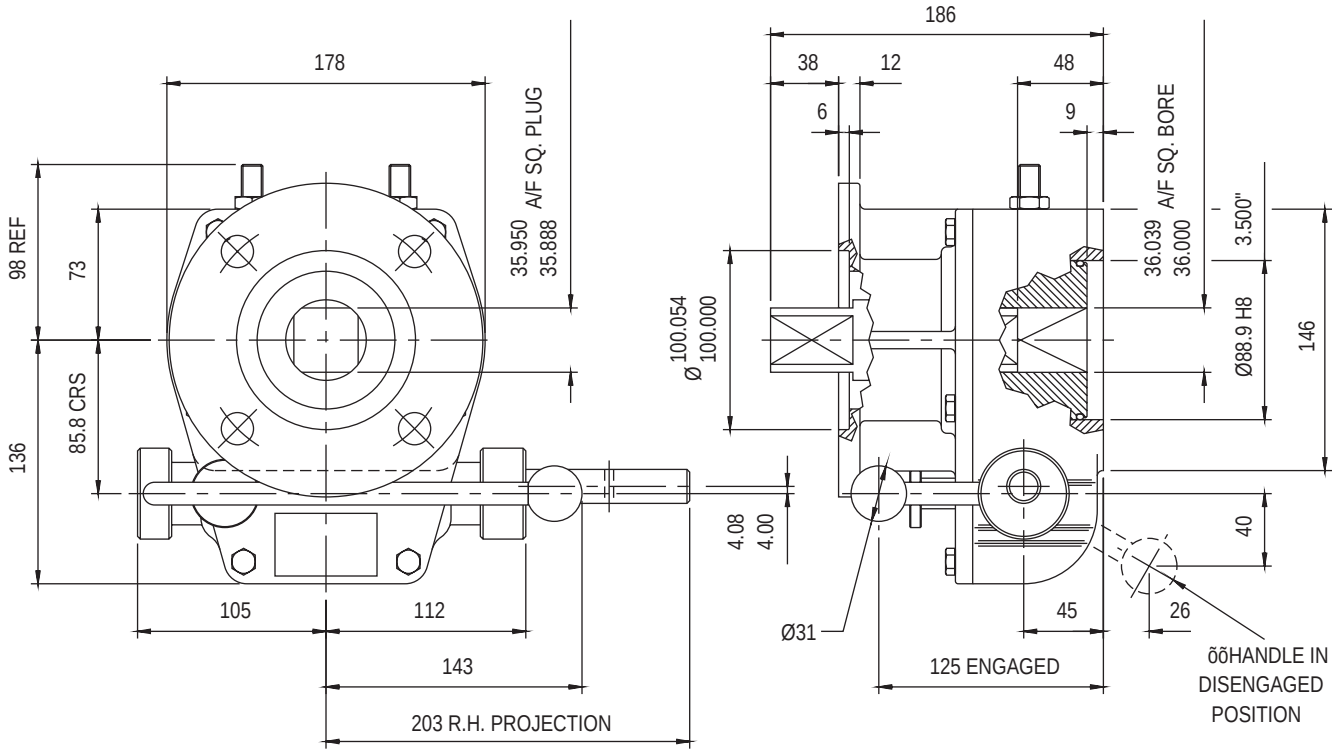

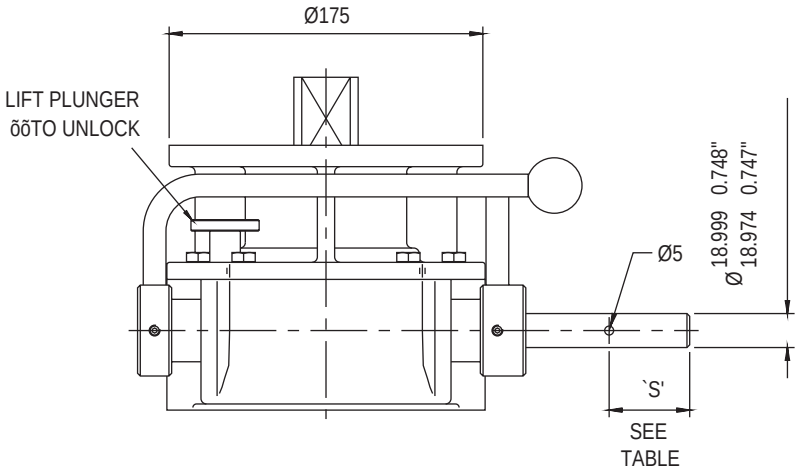

NOTE.
ISO 5211 VERSION SHOWN WITH OUTPUT BORE & TORQUE PLUG FLATS ON CENTRES.
DIN 3337 VERSION ALSO AVAILABLE WITH OUTPUT BORE & TORQUE PLUG CORNERS ON CENTRES.

GENERAL INFORMATION

TRAVEL.....90° +/- 5° AT BOTH ENDS
RATIO.....44:1
TURNS TO CLOSE.....11

MECHANICAL ADVANTAGE.....12.6 +/- 10%
MAXIMUM OUTPUT TORQUE.....1243 Nm
MAXIMUM INPUT TORQUE.....98.7 Nm

BASE MOUNTING HOLE DETAIL.....F14 (4 x M16 ON 140 PCD)
TOP MOUNTING HOLE DETAIL.....4 x Ø18 ON 140 PCD OFF CRS

APPROXIMATE WEIGHT.....18 Kg (excluding handwheel)

HANDWHEEL DATA		
HANDWHEEL DIA		`S'
8"	203	25
10"	254	32
12"	305	32
14"	356	32
18"	457	45

OPPERMAN MASTERGEAR
Hambridge Road, Newbury, Berkshire, RG14 5TS. ENGLAND
Telephone: (01635) 811500 Telefax: (01635) 811501

DIMENSIONS IN	SCALE	DRAWING No.
MM INCHES	1:4	ME-15723

THIS DRAWING/DESIGN IS THE PROPERTY OF OPPERMAN MASTERGEAR LTD. AND © MUST NOT BE USED OR COPIED WITHOUT THEIR SPECIFIC WRITTEN CONSENT.

REV. B
11MAY99