ACTUATOR TYPE - MCWD54/TF16TP

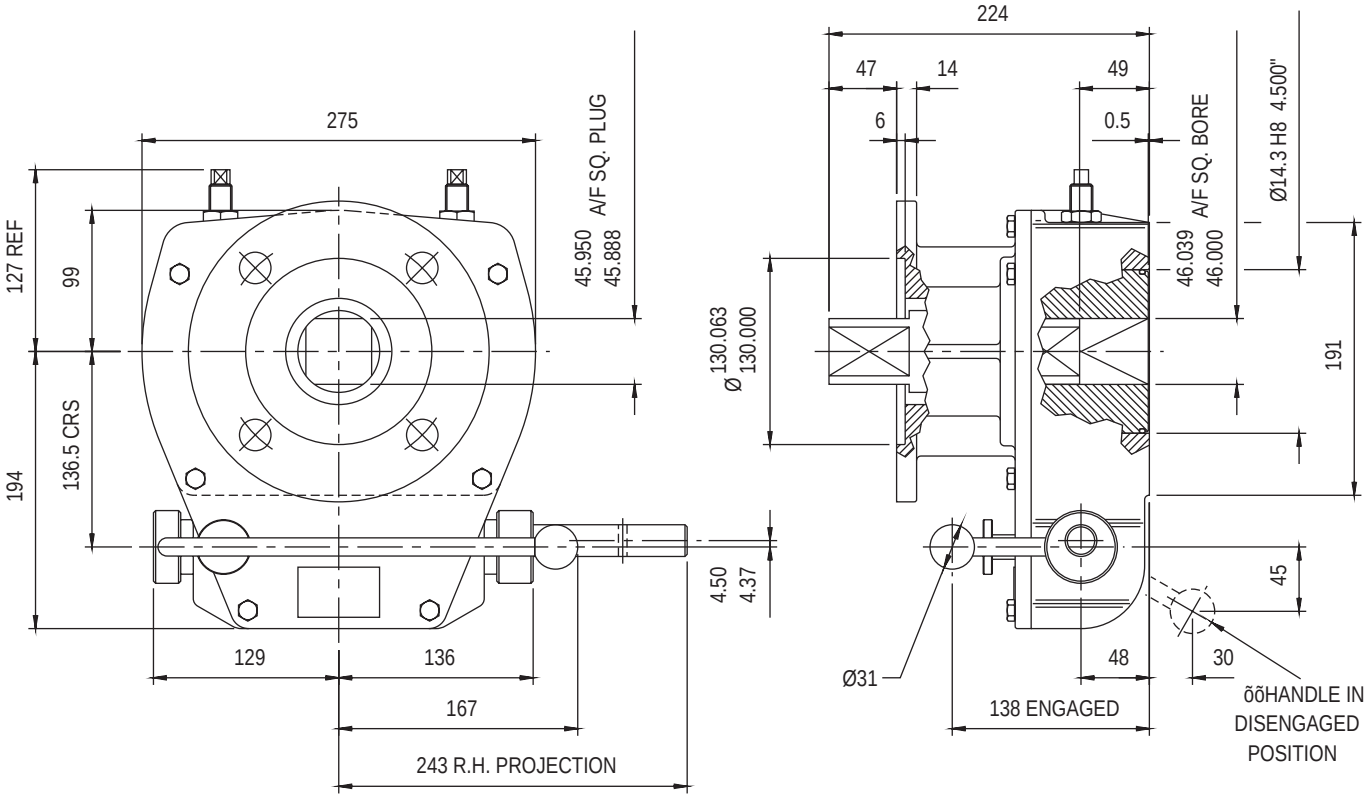

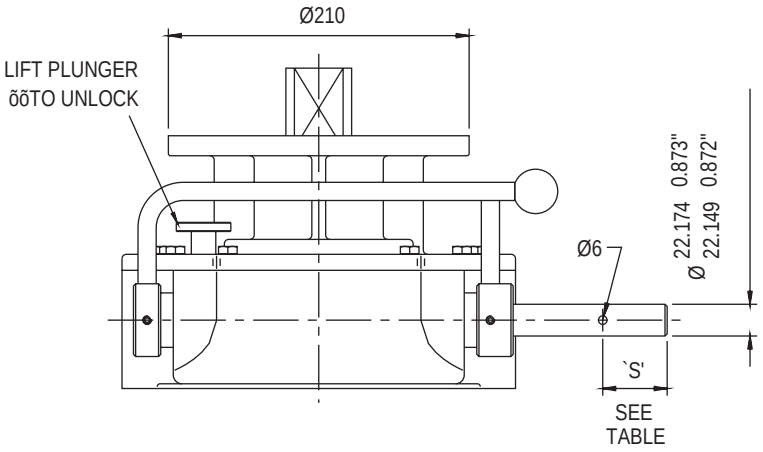

NOTE.
ISO 5211 VERSION SHOWN WITH OUTPUT BORE & TORQUE PLUG FLATS ON CENTRES.
DIN 3337 VERSION ALSO AVAILABLE WITH OUTPUT BORE & TORQUE PLUG CORNERS ON CENTRES.

GENERAL INFORMATION

TRAVEL.....90° +/- 5° AT BOTH ENDS
RATIO.....54:1
TURNS TO CLOSE.....13.5

MECHANICAL ADVANTAGE.....16.7 +/- 10%
MAXIMUM OUTPUT TORQUE.....3220 Nm
MAXIMUM INPUT TORQUE.....192.8 Nm

BASE MOUNTING HOLE DETAIL.....F16 (4 x M20 ON 165 PCD)
TOP MOUNTING HOLE DETAIL.....4 x Ø22 ON 165 PCD OFF CRS

APPROXIMATE WEIGHT.....39 Kg (excluding handwheel)

HANDWHEEL DATA		
HANDWHEEL DIA		`S'
8"	203	25
10"	254	32
12"	305	32
14"	356	32
18"	457	45
24"	610	45

OPPERMAN MASTERGEAR
Hambridge Road, Newbury, Berkshire, RG14 5TS. ENGLAND
Telephone: (01635) 811500 Telefax: (01635) 811501

DIMENSIONS IN	SCALE	DRAWING No.
MM INCHES	1:5	ME-15733

THIS DRAWING/DESIGN IS THE PROPERTY OF OPPERMAN MASTERGEAR LTD. AND © MUST NOT BE USED OR COPIED WITHOUT THEIR SPECIFIC WRITTEN CONSENT.

REV. C
25NOV98